




# LUCID SERIES

THINK RF THINK LUCID

## DESKTOP MODELS

The All-new Lucid-X extends the frequency range of Tabor's industry leading Lucid series of analog signal generator all the way up to mm-Wave, in the smallest footprint module available on the market. Its small size enables using it as a desktop unit or easily scaling up to multiple of channels, while keeping the required space to a minimum, let it be 20GHz or 40GHz, excellent signal quality and integrity and fast switching speeds. The Lucid-X Series is designed to meet today's most demanding specifications, needed from the R&D benches to the production lines.

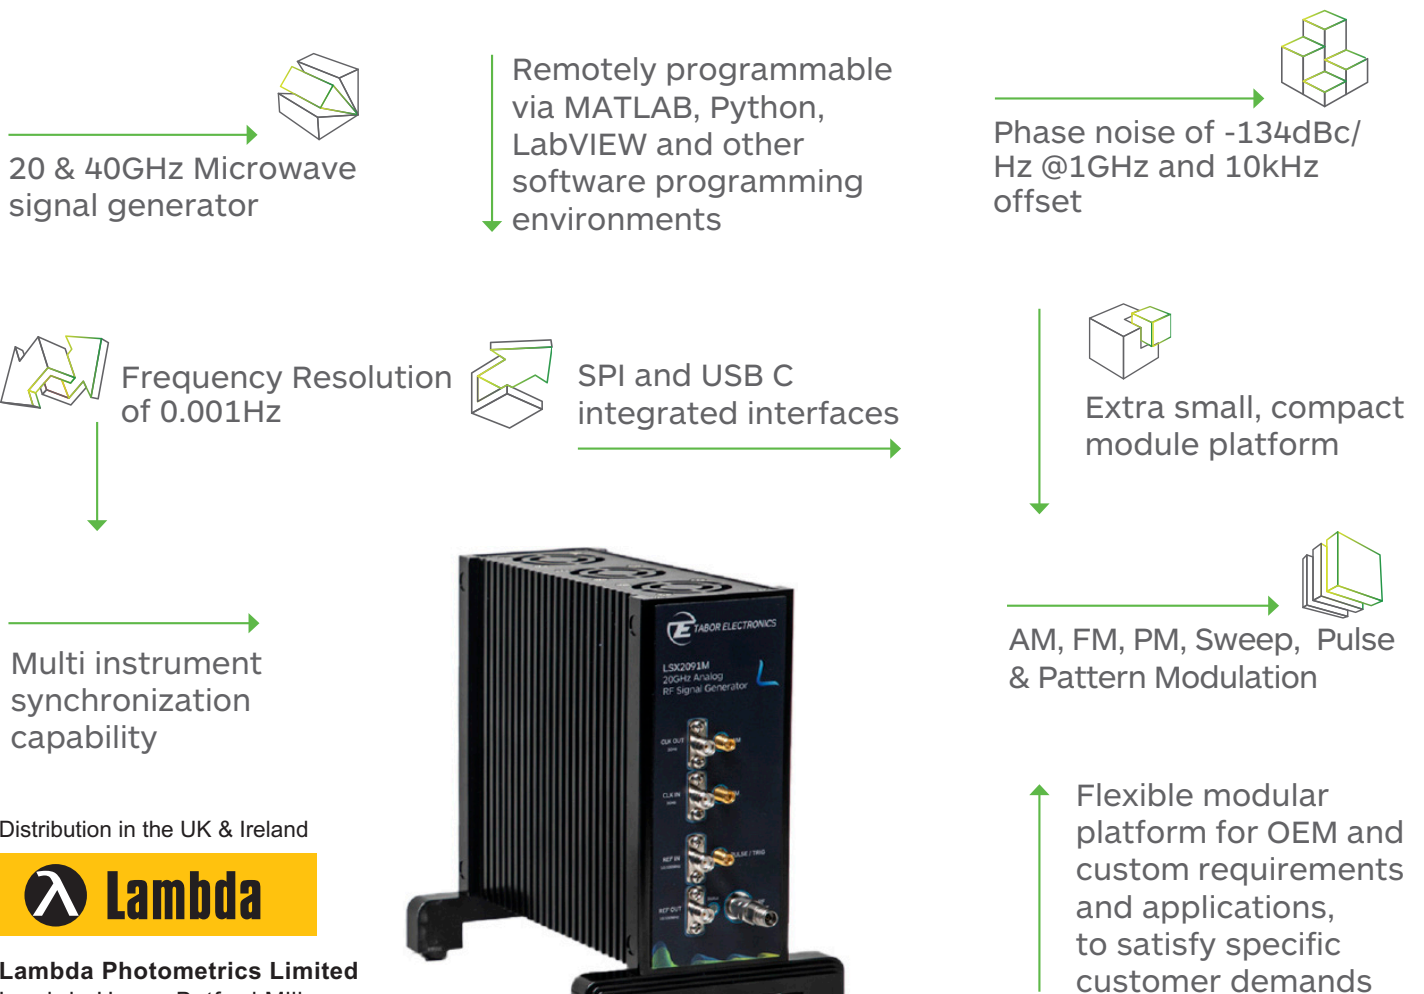

Distribution in the UK & Ireland



**Lambda Photometrics Limited**  
Lambda House Batford Mill  
Harpenden Herts AL5 5BZ  
United Kingdom  
E: [info@lambdaphoto.co.uk](mailto:info@lambdaphoto.co.uk)  
W: [www.lambdaphoto.co.uk](http://www.lambdaphoto.co.uk)  
T: +44 (0)1582 764334  
F: +44 (0)1582 712084



## Signal Integrity and Purity


One of the most important requirements in today's testing and measurement applications is a high signal quality. With a typical SSB phase noise of  $-134\text{dBc/Hz}$  at  $1\text{GHz}$ , and  $-115\text{dBc/Hz}$  at  $10\text{GHz}$ , at  $10\text{kHz}$  carrier offset, Tabor's Lucid X Series platform delivers great quality signals with the best price to performance value.

## Multiple Ways to Control the Unit and Write Your Code

Tabor's Lucid Series has a dedicated software to control the instrument functions, modes and features via a graphical user interface (GUI). It also includes a complete set of drivers, allowing you to write your application in various environments, including LabVIEW, Python, CVI, C++, VB and MATLAB. You may also link the supplied DLL to other Windows-based API's or use low-level SCPI commands to program the instrument, regardless of whether your application is written for Windows, Linux or Macintosh operating systems.

## Modulation Schemes

Signal bursts and chirps have become common need in most aerospace or defense application. With Tabor's All-New Lucid Series, any signal modulation is possible, no matter if "narrow" or "standard" signals are required. On top of its outstanding pulse modulation performance, the Lucid Series is also equipped with many CW interferers, and modulated signals such as AM, FM, PM, Pulse, Pattern and Sweep.

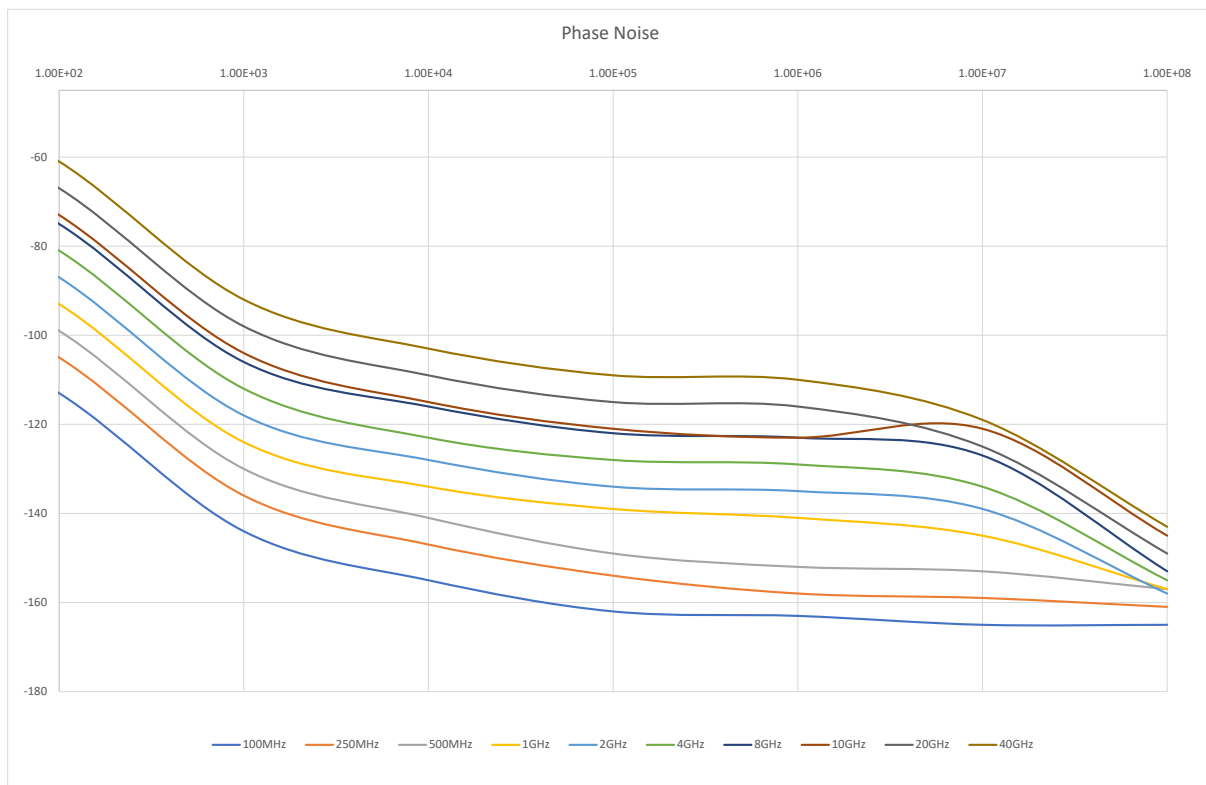

## Specifications

FREQUENCY	
<b>Range:</b>	
LSX2091D:	100 kHz to 20 GHz
LSX4091D:	100 kHz to 40 GHz
<b>Resolution:</b>	0.001 Hz
<b>Phase offset:</b>	0.01 deg
<b>Switching speed:</b>	
Standard:	500 $\mu$ s
FS Option:	100 $\mu$ s

FREQUENCY REFERENCE	
<b>Temp. Stability:</b>	$\pm$ 25 ppb max.
<b>Aging:</b>	$\pm$ 3 ppm for 20 years
<b>Warm up time:</b>	30 min

AMPLITUDE		
<b>Max output power:</b>		
Settable:	+15 dBm	
Calibrated:	+10 dBm	
<b>Min output power:</b>	Base	LP Opt.
Settable:	-70 dBm	-80 dBm
Calibrated:	-50 dBm	-70 dBm
<b>Resolution:</b>	0.01 dB	
<b>Power Mute:</b>	-70 dBm	
<b>Output Return Loss:</b>	-10 dBm	
<b>Accuracy (dB):</b>	-50dBm to +15dBm	
Up to 100MHz:	$\pm$ 0.3 (typ.)	
100MHz to 3GHz:	$\pm$ 0.4 (typ.)	
3GHz to 9GHz:	$\pm$ 0.7 (typ.)	
Above 9GHz:	$\pm$ 1 (typ.)	

PHASE NOISE (dBc/Hz)	
<b>Measured @ 10kHz offset</b>	
100MHz	-155 (typ.)
250MHz	-147 (typ.)
500MHz	-141 (typ.)
1GHz	-134 (typ.)
2GHz	-128 (typ.)
4GHz	-123 (typ.)
8GHz	-116 (typ.)
10GHz	-115 (typ.)
20GHz	-109 (typ.)
40GHz	-103 (typ.)

HARMONICS (typ.)		
<b>Range:</b>	0dBm	+10dBm
Up to 8GHz:	-50dBc	-42dBc
8GHz to 20GHz:	-40dBc	-32dBc
20GHz to 40GHz:	-35dBc	-28dBc

SUB-HARMONICS (typ.)	
<b>Up to 20GHz:</b>	-75 dBc
<b>20 to 40GHz:</b>	-35 dBc

NON-HARMONICS (dBc)	
<b>Up to 40GHz:</b>	-90dBc (typ.) -60dBc max. <sup>(1)</sup>

MODULATION	
<b>FREQUENCY MODULATION</b>	
<b>Maximum Deviation:</b>	10MHz
Resolution:	0.1% or 1Hz (the greater)
<b>Modulation Rate:</b>	1MHz
Resolution:	1Hz

AMPLITUDE MODULATION	
<b>AM Depth:</b>	
Type:	Linear
Maximum settable:	100%
Resolution:	0.1% of depth
<b>Modulation rate:</b>	DC to 100kHz

PHASE MODULATION	
<b>Peak Deviation:</b>	360 deg
<b>Modulation Rate:</b>	DC to 100 kHz

SWEEP	
<b>Range:</b>	Same as freq. range
<b>Modes:</b>	Frequency step, Amplitude step, List
<b>Dwell time:</b>	10 $\mu$ s to 1000 s
<b>Resolution:</b>	1 $\mu$ s
<b>Number of points:</b>	
List:	2 to 4,096
Step:	2 to 65,535
<b>Step change:</b>	Linear
<b>Trigger:</b>	Free run, External, Bus, Timer

PATTERN MODULATION (PAT OPTION)	
<b>Number of steps:</b>	1 to 2048
<b>Step Repetition:</b>	1 to 65535
<b>On/off time:</b>	20ns to 20 days

PULSE MODULATION (PLS OPTION)	
<b>On/off ratio:</b>	70dB
<b>Rise/fall time:</b>	15ns, 10%-90% (typ.)
<b>Resolution:</b>	10ns
<b>Minimum Width:</b>	30ns
<b>Repetition frequency:</b>	DC to 10MHz

INPUTS / OUTPUTS	
<b>RF OUT</b>	
<b>Impedance:</b>	50 $\Omega$
<b>Connector type:</b>	2.4mm
<b>REFERENCE OUT</b>	
<b>Impedance:</b>	50 $\Omega$
<b>Connector type:</b>	SMA
<b>Frequency:</b>	10 MHz or 100 MHz
<b>Shape:</b>	Sine
<b>Power:</b>	3 to 7 dBm

MODULATION INPUT	
<b>Connector Type:</b>	SMP
<b>Input Impedance:</b>	50 $\Omega$
<b>Max. input voltage:</b>	$\pm$ 1V
<b>Input damage level:</b>	$\pm$ 3.5V

PULSE / TRIGGER INPUT	
<b>Connector type:</b>	SMP
<b>Input Impedance:</b>	50 $\Omega$
<b>Input voltage:</b>	TTL, CMOS compatible
Threshold:	1.5V
<b>Damage level:</b>	-0.42V or 5.42V

REFERENCE INPUT	
<b>Connector type:</b>	SMA
<b>Input Impedance:</b>	50 $\Omega$
<b>Waveform:</b>	Sine or Square
<b>Frequency:</b>	10/100MHz
<b>Power:</b>	-3dBm to +10dBm
<b>Absolute Max. Level:</b>	+15dBm

CLOCK INPUT / OUTPUT	
<b>Number of Ports:</b>	2, (1 Input & 1 Output)
<b>Connector type:</b>	SMA
<b>Input Impedance:</b>	50 $\Omega$
<b>Waveform:</b>	Sine
<b>Frequency:</b>	2.7GHz, 3.0GHz, 3.3GHz
<b>Power:</b>	+10dBm
<b>Absolute Max. Level:</b>	+12dBm

<sup>(1)</sup> Boundary spurs which may appear @ -100MHz to +100MHz offset from CW.

LUCID SERIES  
THINK RF THINK LUCID

## Specifications

MULTI-INSTRUMENT SYNCHRONIZATION	
Number of Ports:	2
Type:	SYNC I/O & SYNC X
Connector type:	MMCX
Input Impedance:	50Ω

GENERAL	
Voltage:	+12.0 to +12.6 VDC
Power Consumption:	40W max.
Interface:	USB TYPE C, SPI
Dimensions:	14.5 x 9.5 x 3 cm
Weight:	
Without Package:	1.0 kg
Shipping Weight:	1.5 kg
Temperature:	
Operating:	0°C to +40°C
Storage:	-40°C to +70°C
Warm up time:	15 minutes
Humidity:	85% RH, non-condensing
Safety:	CE Marked, IEC61010-1:2010
EMC:	IEC 61326-1:2013
Calibration:	2 years
Warranty:	3 year standard

ORDERING INFORMATION	
MODEL	DESCRIPTION
LSX2091D	20GHz Microwave Signal Generator Desktop Module
LSX4091D	40GHz Microwave Signal Generator Desktop Module
OPTIONS	
LP	Low Power Option (-90dBc)
PLS	Pulse Modulation
PAT	Pattern Modulation
FS	Fast Switching
EMU	Emulator pack for Keysight, R&S, Anapico & Holzworth

Distribution in the UK & Ireland



**Lambda Photometrics Limited**  
 Lambda House Batford Mill  
 Harpenden Herts AL5 5BZ  
 United Kingdom  
**E:** [info@lambdaphoto.co.uk](mailto:info@lambdaphoto.co.uk)  
**W:** [www.lambdaphoto.co.uk](http://www.lambdaphoto.co.uk)  
**T:** +44 (0)1582 764334  
**F:** +44 (0)1582 712084

All rights reserved to Tabor Electronics Ltd. Tabor makes no representations nor warranties with respect to the accuracy or completeness of the contents and reserves the right to make changes at any time without notice. Ver\_0.95