


# Coaxial lights

Coaxial lights are used for sharp detection which requires a very even light over the whole area. The light is covered by a coated protective glass. Mounting: four M4 screws suited for LATAB brackets.



## Mechanical dimensions

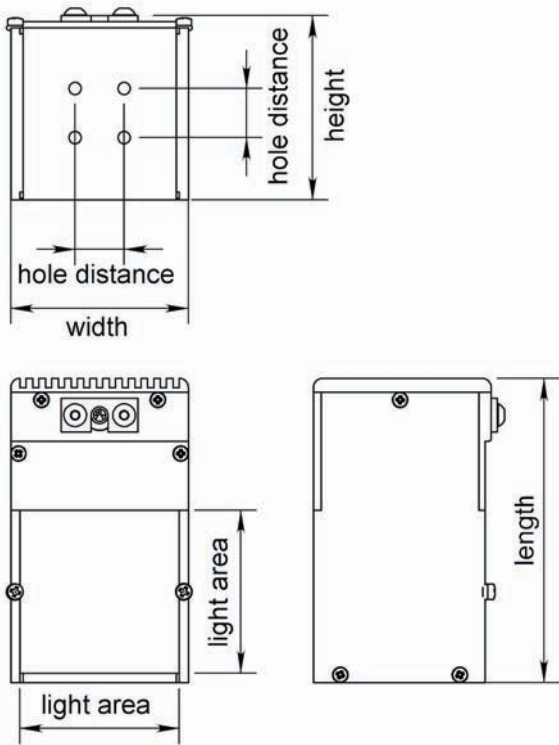

## Options

- Cable length and type see "Order options"
- Bracket options see "Brackets"

## Order information

Order number	Side length of active light area (mm)	Width (mm)	Height (mm)	Length (mm)	Mounting hole distance (mm)	Controller <sup>1)</sup>	
						steady mode	strobe mode
SAX9 2525	25	30.5	33	70	10	1 A	8 A
SAX9 5050	50	55.5	58	95	16	1 A	8 A
SAX9 7575	75	80.5	84	120	16	1 A 3 A <sup>2)</sup>	8 A 24 A <sup>2)</sup>
SAX9 0110	109	115	118	159	16	3 A	24 A
SAX9 0145	145	150	153	190	16	3 A <sup>3)</sup>	24 A <sup>3)</sup>

- <sup>1)</sup> See controller selection for details  
<sup>2)</sup> For light colors white, blue, green and UV  
<sup>3)</sup> For light colors red and IR, others on request

## Color information

Replace "X" in order number by one character <sup>3)</sup>	Color	Wavelength
H	Red	617 nm
W	White	
R	IR	880 nm
B	Blue	465 nm
G	Green	520 nm
U	UV	395 nm

<sup>3)</sup> Example for red coaxial light: SAH9 2525

Distribution in the UK & Ireland



**Lambda Photometrics Limited**  
 Lambda House Batford Mill  
 Harpenden Herts AL5 5BZ  
 United Kingdom  
 E: [info@lambdaphoto.co.uk](mailto:info@lambdaphoto.co.uk)  
 W: [www.lambdaphoto.co.uk](http://www.lambdaphoto.co.uk)  
 T: +44 (0)1582 764334  
 F: +44 (0)1582 712084

**Characterisation,  
 Measurement &  
 Analysis**