

EMC Test Report

Client Name : Saleae, Inc
Address : 408 N Canal Street, Suite A-South San Francisco, 94080
California, USA
Product Name : Logic Pro 16
Date : Jul. 28, 2021



Shenzhen Anbotek Compliance Laboratory Limited

Contents

| | |
|--|----|
| 1. General Information..... | 4 |
| 1.1. Client Information..... | 4 |
| 1.2. Description of Device (EUT)..... | 4 |
| 1.3. Auxiliary Equipment Used During Test..... | 5 |
| 1.4. Description of Test Mode..... | 6 |
| 1.5. Test Summary..... | 6 |
| 1.6. Test Equipment List..... | 7 |
| 1.7. Description of Test Facility..... | 8 |
| 1.8. EMS Performance Criteria..... | 9 |
| 2. Radiated Emission Test..... | 10 |
| 2.1. Test Standard and Limit..... | 10 |
| 2.2. Test Setup..... | 10 |
| 2.3. EUT Configuration on Measurement..... | 10 |
| 2.4. Operating Condition of EUT..... | 11 |
| 2.5. Test Procedure..... | 11 |
| 2.6. Test Results..... | 11 |
| 3. Electrostatic Discharge Immunity Test..... | 14 |
| 3.1. Test Standard and Level..... | 14 |
| 3.2. Test Setup..... | 14 |
| 3.3. EUT Configuration on Measurement..... | 14 |
| 3.4. Operating Condition of EUT..... | 14 |
| 3.5. Test Procedure..... | 15 |
| 3.6. Test Results..... | 15 |
| 4. RF Field Strength Susceptibility Test..... | 17 |
| 4.1. Test Standard and Level..... | 17 |
| 4.2. Test Setup..... | 17 |
| 4.3. EUT Configuration on Measurement..... | 18 |
| 4.4. Operating Condition of EUT..... | 18 |
| 4.5. Test Procedure..... | 18 |
| 4.6. Measuring Results..... | 18 |
| APPENDIX I -- TEST SETUP PHOTOGRAPH..... | 20 |
| APPENDIX II -- EXTERNAL PHOTOGRAPH..... | 22 |
| APPENDIX III -- INTERNAL PHOTOGRAPH..... | 27 |

TEST REPORT

Applicant : Saleae, Inc
Manufacturer : Diamond Digital Corporation
Product Name : Logic Pro 16
Model No. : SAL-00115, SAL-00115 (black), SAL-00116 (red)
Trade Mark : Saleae
Rating(s) : Input: DC 5V, 0.721A, 3.61W
**Test Standard(s) : EN 55032: 2015+A11: 2020;
EN 55035: 2017+A11: 2020;
(IEC 61000-4-2; IEC 61000-4-3)**

The device described above is tested by Shenzhen Anbotek Compliance Laboratory Limited to determine the maximum emission levels emanating from the device and the severe levels of the device can endure and its performance criterion. The measurement results are contained in this test report and Shenzhen Anbotek Compliance Laboratory Limited is assumed full of responsibility for the accuracy and completeness of these measurements. Also, this report shows that the EUT (Equipment Under Test) is technically compliant with the EN 55032, EN 55035 requirements.

This report applies to above tested sample only and shall not be reproduced in part without written approval of Shenzhen Anbotek Compliance Laboratory Limited.

Date of Receipt: Jun. 28, 2021

Date of Test: Jun. 28~Jul. 12, 2021

Prepared By:

Yee Huang

(Yee Huang)

Approved & Authorized Signer:

Tom Chen

(Tom Chen)

1. General Information

1.1. Client Information

| | | |
|--------------|---|--|
| Applicant | : | Saleae, Inc |
| Address | : | 408 N Canal Street, Suite A-South San Francisco, 94080 California, USA |
| Manufacturer | : | Diamond Digital Corporation |
| Address | : | 6F.-1, 6F., NO.168 LIANCHENG RD., LIANCHENG RD., ZHONGHE NEW TAIPEI NEW TAIPEI CITY 23553, TAIWAN. |
| Factory | : | Diamond Digital Corporation |
| Address | : | 6F.-1, 6F., NO.168 LIANCHENG RD., LIANCHENG RD., ZHONGHE NEW TAIPEI NEW TAIPEI CITY 23553, TAIWAN. |

1.2. Description of Device (EUT)

| | | |
|---------------------|---|--|
| Product Name | : | Logic Pro 16 |
| Model No. | : | SAL-00115, SAL-00115 (black), SAL-00116 (red) (Note: All samples are the same except the model number & appearance, so we prepare "SAL-00115" for test only.) |
| Trade Mark | : | Saleae |
| Test Power Supply | : | DC 5V via PC |
| Test Sample No. | : | 1-1-1 |
| Product Description | : | Adapter: N/A |

Remark: (1) For a more detailed features description, please refer to the manufacturer's specifications or the User's Manual.


1.3. Auxiliary Equipment Used During Test

| | | |
|----------|---|--|
| PC | : | Manufacturer: DELL |
| | : | M/N: Optiplex 3020 MT S/N: CN-079V51-70163-4AD-089K-A00 Input Rating: AC 100-240V, 50-60Hz 5.4A CE , FCC DOC, CCC |
| MONITOR | : | Manufacturer: DELL |
| | : | M/N: E1914Hf S/N: CN-034H2R-72872-419-AFJB Input:100V-240V, 1.5A, 50/60Hz TUV-GS, FCC, CE, KCC, VCCI |
| KEYBOARD | : | Manufacturer: DELL |
| | : | M/N: SK-8120 S/N: CN-0DJ365-71616-49J-0MVR-A00 Input Rating: DC 5V, 0.05A CE, FCC, VCCI, KCC, TUV-GS Cable: 1.8m, unshielded |
| MOUSE | : | Manufacturer: DELL |
| | : | M/N: MS111-T S/N: CN-0KW2YH-71616-488-1CBJ Input Rating: DC 5V, 0.1A Cable: 1.8m, unshielded CE, FCC, VCCI, KCC, TUV-GS |

1.4. Description of Test Mode

| Pretest Mode | Description |
|--------------|-------------|
| Mode 1 | On |

For Mode 1 Block Diagram of Test Setup

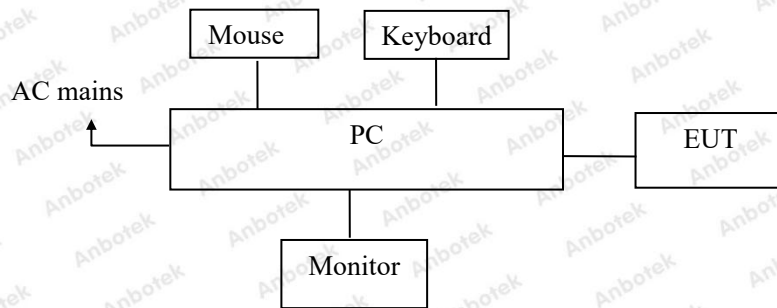

1.5. Test Summary

| Test Items | Test Mode | Status |
|--|-----------|--------|
| Power Line Conducted Emission Test (150KHz To 30MHz) | / | N |
| Radiated Emission Test (30MHz To 1000MHz) | Mode 1 | P |
| Electrostatic Discharge immunity Test | Mode 1 | P |
| RF Field Strength susceptibility Test | Mode 1 | P |
| Electrical Fast Transient/Burst Immunity Test | / | N |
| Surge Immunity Test | / | N |
| Injected Currents Susceptibility Test | / | N |
| Magnetic Field Susceptibility Test | / | N |
| Voltage Dips and Interruptions Test | / | N |
| P) Indicates "PASS". | | |
| N) Indicates "Not applicable". | | |

1.6. Test Equipment List

Radiated Emission Measurement

| Item | Equipment | Manufacturer | Model No. | Serial No. | Last Cal. | Cal. Interval |
|------|-------------------------|--------------------|-----------|------------|---------------|---------------|
| 1. | EMI Test Receiver | Rohde & Schwarz | ESCI | 100627 | Oct. 26, 2020 | 1 Year |
| 2. | Pre-amplifier | Schwarzbeck | BBV-9745 | 9745-075 | Oct. 26, 2020 | 1 Year |
| 3. | Bilog Broadband Antenna | SCHWARZBECK | VULB 9163 | 01109 | Nov. 02, 2020 | 2 Year |
| 4. | Software Name EZ-EMC | Ferrari Technology | EMEC-3A1 | N/A | N/A | N/A |

Electrostatic Discharge Measurement

| Item | Equipment | Manufacturer | Model No. | Serial No. | Last Cal. | Cal. Interval |
|------|----------------|--------------|------------|------------|---------------|---------------|
| 1. | ESD Simulators | emtest | ESD NX30.1 | 11891 | Mar. 25, 2021 | 1 Year |

R/S Immunity Measurement

| Item | Equipment | Manufacturer | Model No. | Serial No. | Last Cal. | Cal. Interval |
|------|----------------------|-------------------------|-----------------------|----------------|---------------|---------------|
| 1. | Signal Generator | Agilent | N5182A | MY4818065 6 | Oct. 26, 2020 | 1 Year |
| 2. | Amplifier | Micotoop | MPA-80-100 0-250 | MPA190309 6 | Oct. 26, 2020 | 1 Year |
| 3. | Amplifier | Micotoop | MPA-1000-6 000-100 | MPA190312 2 | Oct. 26, 2020 | 1 Year |
| 4. | Log-Periodic Antenna | Schwarzbeck | VULP9118E | 00992 | Apr.17, 2021 | 1 Year |
| 5. | Horn Antenna | Instruments corporation | GTH-0118 | 351600 | Nov. 02, 2020 | 2 Year |
| 6. | Power Sensor | Agilent | E9301A | MY4149890 6 | Oct. 26, 2020 | 1 Year |
| 7. | Power Sensor | Agilent | E9301A | MY4149808 8 | Oct. 26, 2020 | 1 Year |
| 8. | Power Meter | Agilent | E4419B | GB4020290 9 | Oct. 26, 2020 | 1 Year |
| 9. | Field Probe | ETS-Lindgren | HI-6006 | 00212747 | Apr.17, 2021 | 1 Year |
| 10. | RS Test software | EMtrace | EM 3 | V1.1.7 | N/A | N/A |



1.7. Description of Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

FCC-Registration No.: 184111

Shenzhen Anbotek Compliance Laboratory Limited, EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in our files. Registration No. 184111, September 30, 2020.

ISED-Registration No.: 8058A

Shenzhen Anbotek Compliance Laboratory Limited, EMC Laboratory has been registered and fully described in a report filed with the (ISED) Innovation, Science and Economic Development Canada. The acceptance letter from the ISED is maintained in our files. Registration 8058A, September 30, 2020.

Test Location

Shenzhen Anbotek Compliance Laboratory Limited.

1/F, Building D, Sogood Science and Technology Park, Sanwei community, Hangcheng Street, Bao'an District, Shenzhen, Guangdong, China.518128



1.8. EMS Performance Criteria

- ✓ A: Normal performance within the specification limits
- ✓ B: Temporary degradation or loss of function or performance which is self-recoverable
- ✓ C: Temporary degradation or loss of function or performance which requires operator intervention or system reset
- ✓ D: Degradation or loss of function which is not recoverable due to damage of equipment (components) or software, or loss of data

Note: The manufacturer's specification may define effects on the EUT which may be considered insignificant, and therefore acceptable.

This classification may be used as a guide in formulating performance criteria, by committees responsible for generic, product and product-family standards, or as a framework for the agreement on performance criteria between the manufacturer and the purchaser, for example where no suitable generic, product or product-family standard exists.



2. Radiated Emission Test

2.1. Test Standard and Limit


| | |
|---------------|----------|
| Test Standard | EN 55032 |
|---------------|----------|

Radiated Emission Test Limit

| Test Limit | Frequency (MHz) | DISTANCE (Meters) | FIELD STRENGTHS LIMIT (dB μ V/m) |
|------------|-----------------|-------------------|--------------------------------------|
| | 30 ~ 230 | 3 | 40 |
| | 230 ~ 1000 | 3 | 47 |

Remark: (1)The smaller limit shall apply at the combination point between two frequency bands.
 (2) Distancer efers to the distance in meters between the measuring instrument antenna and the closed point of any part of the EUT.
 (3) $3M \text{ Limit} = 10M \text{ Limit} + k$ $k = 20 \log(D1/D2) = 10$
 $3M \text{ Limit} = 10M \text{ Limit} + 10$
 (D1= 10M D2=3M)

2.2. Test Setup

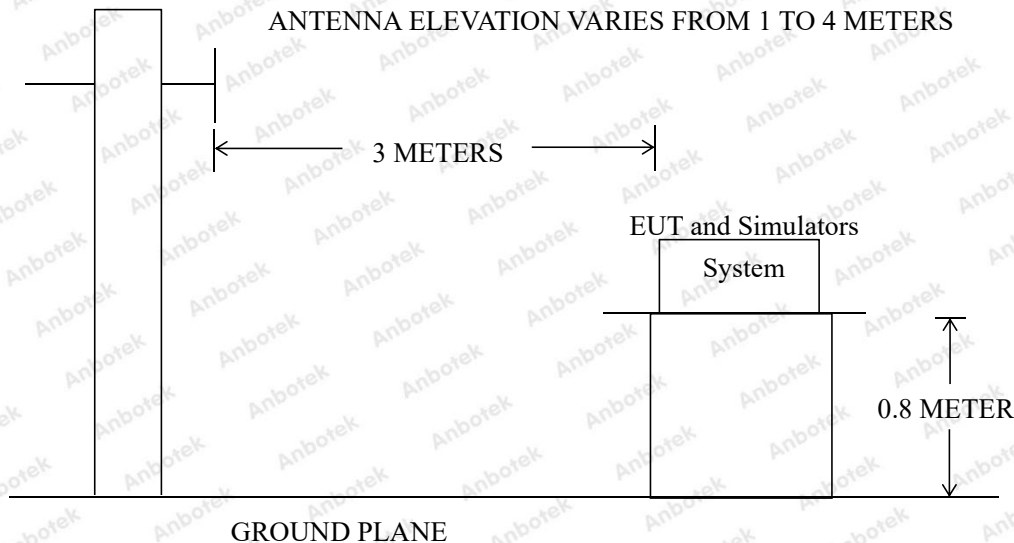

2.3. EUT Configuration on Measurement

The EN 55032 regulations test method must be used to find the maximum emission during radiated emission measurement.

2.4. Operating Condition of EUT

2.4.1. Setup the EUT as shown in Section 2.2.

2.4.2. Turn on the power of all equipments.

2.4.3. Let the EUT work in test mode and measure it.

2.5. Test Procedure

The EUT is placed on a turn table which is 0.8 meter high above the ground. The turn table can rotate 360 degrees to determine the position of the maximum emission level. The EUT is set 3 meters away from the receiving antenna which is mounted on a antenna tower. The antenna can be moved up and down from 1 to 4 meters to find out the maximum emission level. Bilog antenna is used as a receiving antenna. Both horizontal and vertical polarization of the antenna are set on test.

The bandwidth of the Receiver (ESCI) is set at 120kHz.

The EUT is tested in 9*6*6 Chamber.

The test results are listed in Section 2.6.

2.6. Test Results


PASS

The frequency range from 30MHz to 1000MHz is investigated.

The test curves are shown in the following pages.




Test item: Radiation Test **Polarization:** Horizontal
Standard: (RE)EN55032 **Power Source:** DC 5V via PC
Distance: 3m **Temp.(°C)/Hum.(%RH):** 22.6(°C)/50%RH

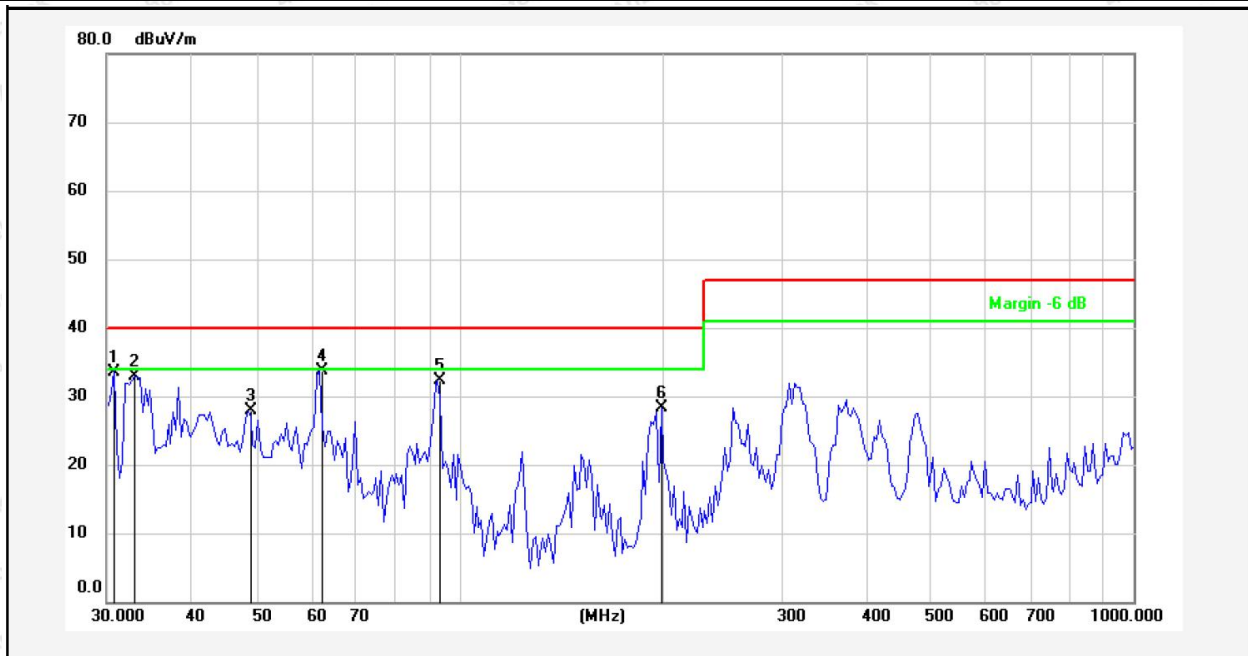

| No. | Freq. (MHz) | Reading (dBuV) | Factor () | Result (dBuV/m) | Limit (dBuV/m) | Over Limit (dB) | Detector | Height (cm) | degree (deg) | Remark |
|-----|-------------|----------------|------------|-----------------|----------------|-----------------|----------|-------------|--------------|--------|
| 1 | 30.7992 | 50.41 | -16.81 | 33.60 | 40.00 | -6.40 | peak | | | |
| 2 | 33.0369 | 49.66 | -16.83 | 32.83 | 40.00 | -7.17 | peak | | | |
| 3 | 48.5867 | 43.76 | -15.84 | 27.92 | 40.00 | -12.08 | peak | | | |
| 4 | 62.1039 | 50.88 | -17.23 | 33.65 | 40.00 | -6.35 | peak | | | |
| 5 | 92.9501 | 49.11 | -16.86 | 32.25 | 40.00 | -7.75 | peak | | | |
| 6 | 199.2855 | 46.06 | -17.81 | 28.25 | 40.00 | -11.75 | peak | | | |

Note: Result=Reading+Factor Over Limit=Result-Limit

Test item: Radiation Test **Polarization:** Vertical
Standard: (RE)EN55032 **Power Source:** DC 5V via PC
Distance: 3m **Temp.(°C)/Hum.(%RH):** 22.6(°C)/50%RH

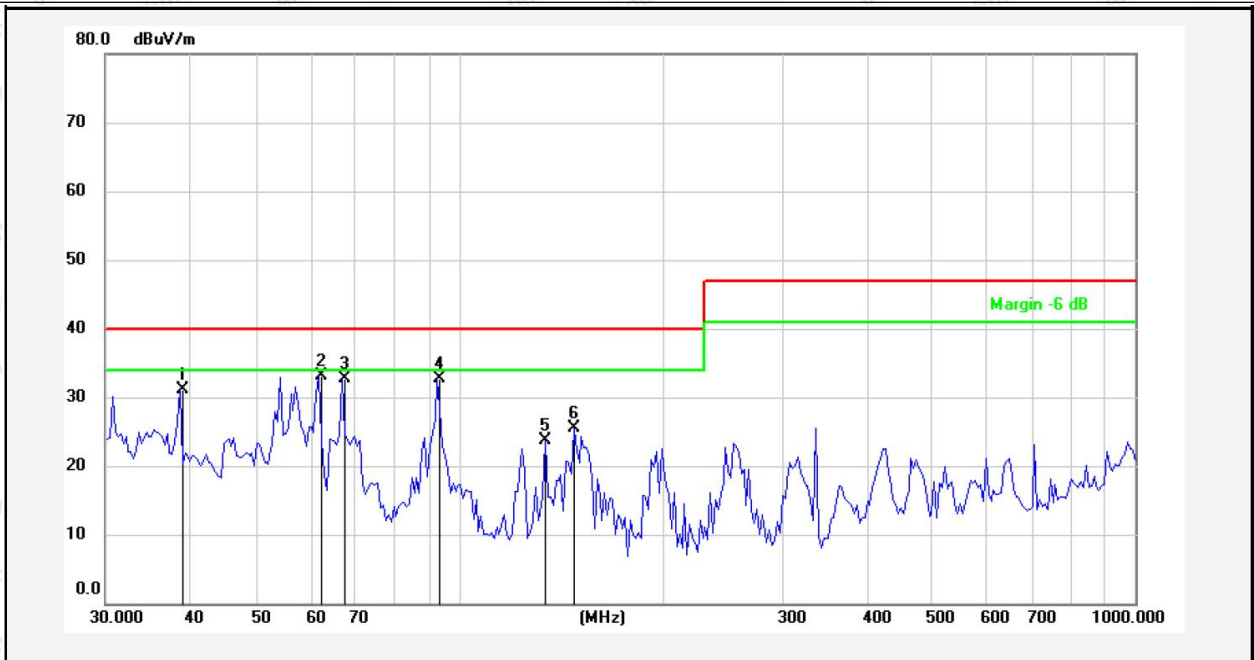

| No. | Freq. (MHz) | Reading (dBuV) | Factor () | Result (dBuV/m) | Limit (dBuV/m) | Over Limit (dB) | Detector | Height (cm) | degree (deg) | Remark |
|-----|-------------|----------------|------------|-----------------|----------------|-----------------|----------|-------------|--------------|--------|
| 1 | 38.6839 | 47.07 | -15.91 | 31.16 | 40.00 | -8.84 | peak | | | |
| 2 | 62.1039 | 50.27 | -17.23 | 33.04 | 40.00 | -6.96 | peak | | | |
| 3 | 67.2022 | 51.87 | -19.26 | 32.61 | 40.00 | -7.39 | peak | | | |
| 4 | 92.9501 | 49.58 | -16.86 | 32.72 | 40.00 | -7.28 | peak | | | |
| 5 | 134.3233 | 43.87 | -20.08 | 23.79 | 40.00 | -16.21 | peak | | | |
| 6 | 147.9214 | 45.94 | -20.37 | 25.57 | 40.00 | -14.43 | peak | | | |

Note: Result=Reading+Factor Over Limit=Result-Limit

3. Electrostatic Discharge Immunity Test


3.1. Test Standard and Level

| | |
|--|--------------------------|
| Test Standard: | EN 55035 (IEC 61000-4-2) |
| Performance Criterion: | B |
| Severity Level: 3 / Air Discharge: $\pm 8\text{kV}$, Level: 2 / Contact Discharge: $\pm 4\text{kV}$ | |

Test Level

| Level | Test Voltage Contact Discharge (kV) | Test Voltage Air Discharge (kV) |
|-------|--|------------------------------------|
| 1. | ± 2 | ± 2 |
| 2. | ± 4 | ± 4 |
| 3. | ± 6 | ± 8 |
| 4. | ± 8 | ± 15 |
| X. | Special | Special |

3.2. Test Setup

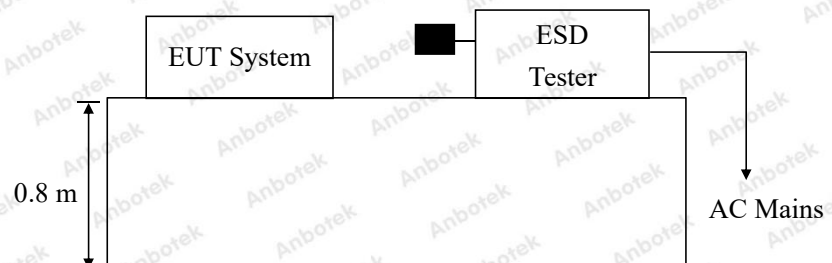

3.3. EUT Configuration on Measurement

The following equipments are installed on electrostatic discharge immunity measurement to meet EN 55035 requirements and operating in a manner which tends to maximize its emission characteristics in a normal application.

3.4. Operating Condition of EUT

- 3.4.1. Setup the EUT as shown on Section 3.2.
- 3.4.2. Turn on the power of all equipments.
- 3.4.3. After that, let the EUT work in test mode measure it.

3.5. Test Procedure

3.5.1. Air Discharge:

This test is done on a non-conductive surface. The round discharge tip of the discharge electrode shall be approached as fast as possible to touch the EUT. After each discharge, the discharge electrode shall be removed from the EUT. The generator is then re-triggered for a new single discharge and repeated 10 times for each pre-selected test point. This procedure shall be repeated until all the air discharge completed

3.5.2. Contact Discharge:

All the procedure shall be same as Section 3.5.1. except that the tip of the discharge electrode shall touch the EUT before the discharge switch is operated.

3.5.3. Indirect discharge for horizontal coupling plane

At least 20 single discharges shall be applied to the horizontal coupling plane, at points on each side of the EUT. The discharge electrode positions vertically at a distance of 0.1m from the EUT and with the discharge electrode touching the coupling plane.

3.5.4. Indirect discharge for vertical coupling plane

At least 20 single discharge shall be applied to the center of one vertical edge of the coupling plane. The coupling plane, of dimensions 0.5m × 0.5m, is placed parallel to, and positioned at a distance of 0.1m from the EUT. Discharges shall be applied to the coupling plane, with this plane in sufficient different positions that the four faces of the EUT are completely illuminated.

3.6. Test Results

PASS

Please refer to the following page.



Electrostatic Discharge Test Results

| Air discharge : | ±8.0kV | Temperature : | 23.3℃ |
|---|--------------|--|---|
| Contact discharge : | ±4.0kV | Humidity : | 50% |
| Power Supply : | DC 5V via PC | Expert conclusion: | B |
| Number of discharge : | 10 | Test Result: | <input checked="" type="checkbox"/> Pass <input type="checkbox"/> Fail |
| Location | | Kind A-Air Discharge C-Contact Discharge | Result |
| Metal | 4 points | C | <input type="checkbox"/> A <input checked="" type="checkbox"/> B <input type="checkbox"/> C <input type="checkbox"/> D |
| Screw | 4 points | C | <input checked="" type="checkbox"/> A <input type="checkbox"/> B <input type="checkbox"/> C <input type="checkbox"/> D |
| HCP | 4 points | C | <input checked="" type="checkbox"/> A <input type="checkbox"/> B <input type="checkbox"/> C <input type="checkbox"/> D |
| VCP of the front | 4 points | C | <input checked="" type="checkbox"/> A <input type="checkbox"/> B <input type="checkbox"/> C <input type="checkbox"/> D |
| VCP of the rear | 4 points | C | <input checked="" type="checkbox"/> A <input type="checkbox"/> B <input type="checkbox"/> C <input type="checkbox"/> D |
| VCP of the left | 4 points | C | <input checked="" type="checkbox"/> A <input type="checkbox"/> B <input type="checkbox"/> C <input type="checkbox"/> D |
| VCP of the right | 4 points | C | <input checked="" type="checkbox"/> A <input type="checkbox"/> B <input type="checkbox"/> C <input type="checkbox"/> D |
| Remark: Discharge should be considered on Contact and Air and Horizontal Coupling Plane (HCP) and Vertical Coupling Plane (VCP). | | | |

4. RF Field Strength Susceptibility Test


4.1. Test Standard and Level

| | |
|-----------------------|--|
| Test Standard: | EN 55035 (IEC 61000-4-3) |
| Required Performance: | A |
| Frequency Range: | 80MHz to 1000MHz, 1800MHz, 2600MHz, 3500MHz, 5000MHz |
| Field Strength: | 3 V/m |
| Modulation: | 1kHz Sine Wave, 80%, AM Modulation |
| Frequency Step: | 1 % of preceding frequency value |
| Polarity of Antenna: | Horizontal and Vertical |
| Test Distance: | 3 m |
| Antenna Height: | 1.5 m |
| Dwell Time: | at least 0.5s |

Test Level

| Level | Field Strength V/m |
|-------|-----------------------|
| 1. | 1 |
| 2. | 3 |
| 3. | 10 |
| X. | Special |

4.2. Test Setup

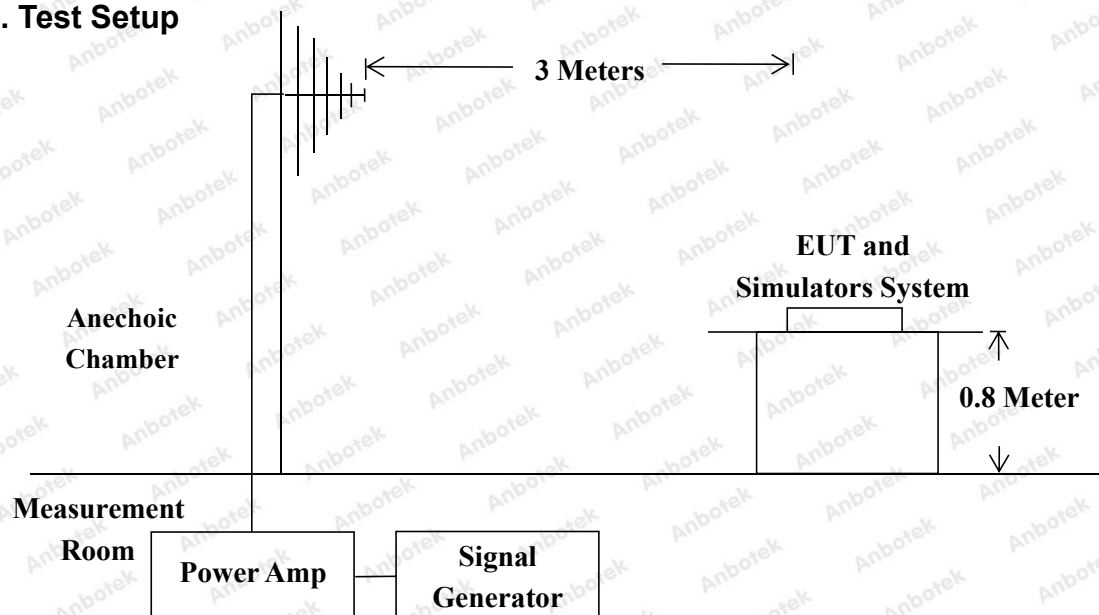

4.3. EUT Configuration on Measurement

The following equipments are installed on RF Field Strength susceptibility Measurement to meet EN 55035 requirements and operating in a manner which tends to maximize its emission characteristics in a normal application.

4.4. Operating Condition of EUT

4.4.1. Setup the EUT as shown on Section 4.2.

4.4.2. Turn on the power of all equipments.

4.4.3. After that, let the EUT work in test mode measure it.

4.5. Test Procedure

The EUT and support equipment, which are placed on a table that is 0.8 meter above ground and the testing was performed in a fully-anechoic chamber. The testing distance from antenna to the EUT was 3 meters.

- 1) 80 MHz to 1000 MHz the field strength level was 3V/m, 1800MHz, 2600MHz, 3500MHz, 5000MHz the field strength level was 3V/m.
- 2) The frequency range is swept from 80 MHz to 1000 MHz with the signal 80% amplitude modulated with a 1kHz sine wave.
- 3) The frequency range is swept from 1800MHz, 2600MHz, 3500MHz, 5000MHz with the signal 80% amplitude modulated with a 1kHz sine wave.
- 4) The dwell time at each frequency shall be not less than the time necessary for the EUT to be able to respond, but shall in no case be less than 0.5s.
- 5) The test was performed with the EUT exposed to both vertically and horizontally polarized fields on each of the four sides.

4.6. Measuring Results

PASS

Please refer to the following page.



RF Field Strength Susceptibility Test Results

| | | | |
|--------------------|--------------|---------------|--|
| Field Strength : | 3V/m | Temperature : | 23.5°C |
| Expert conclusion: | A | Humidity : | 52% |
| Power Supply : | DC 5V via PC | Test Result : | <input checked="" type="checkbox"/> Pass <input type="checkbox"/> Fail |
| Dwell Time: | 1s | | |

| Frequency Range | Antenna Polarity | R.F. Field Strength | Azimuth | Result |
|--|------------------|---------------------|---------|---|
| 80MHz~1000MHz | H / V | 3 V/m (rms) | Front | <input checked="" type="checkbox"/> A <input type="checkbox"/> B <input type="checkbox"/> C <input type="checkbox"/> D |
| | | | Rear | |
| | | | Left | |
| | | | Right | |
| 1800MHz 2600MHz 3500MHz 5000MHz | H / V | 3 V/m (rms) | Front | <input checked="" type="checkbox"/> A <input type="checkbox"/> B <input type="checkbox"/> C <input type="checkbox"/> D |
| | | | Rear | |
| | | | Left | |
| | | | Right | |
| | | | | |

APPENDIX I -- TEST SETUP PHOTOGRAPH

Photo of Radiated Emission Test



Photo of Electrostatic Discharge Immunity Test

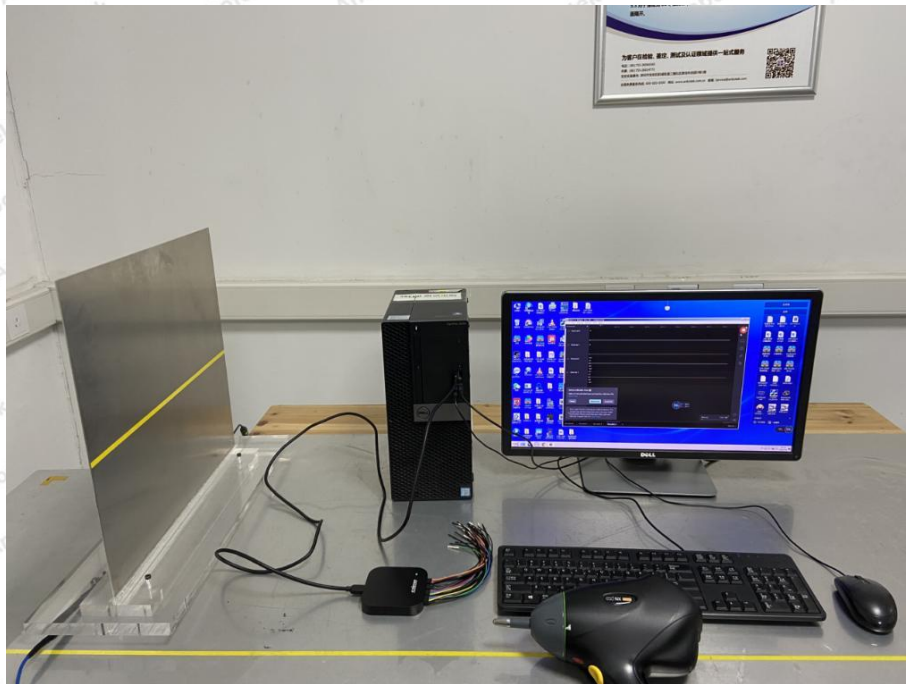


Photo of RF Field Strength susceptibility Test






APPENDIX II -- EXTERNAL PHOTOGRAPH











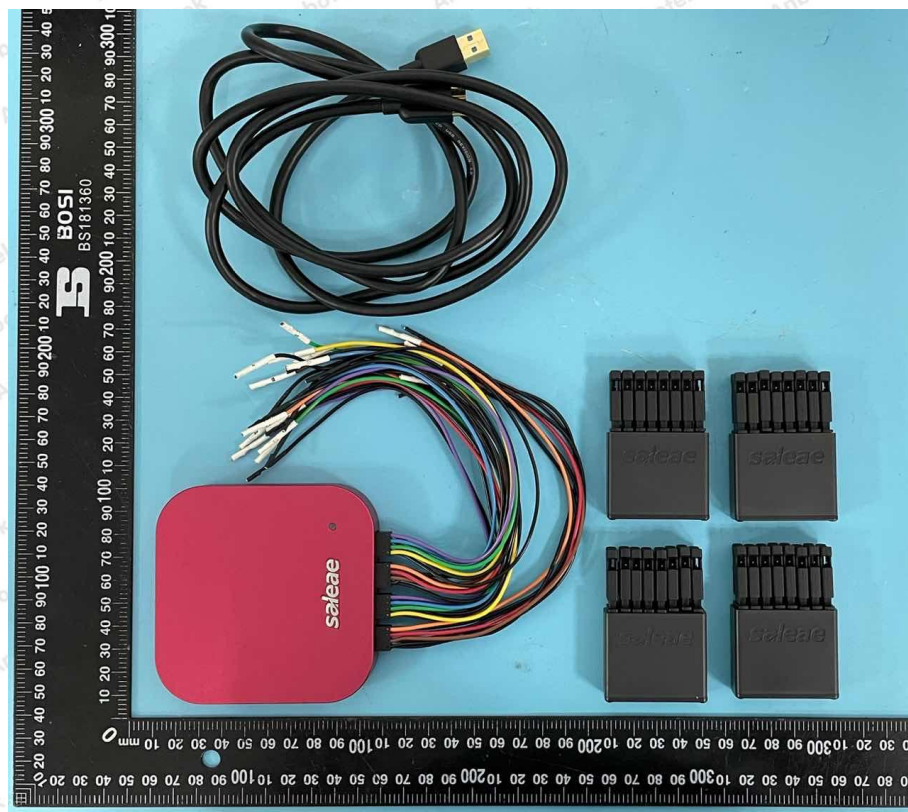

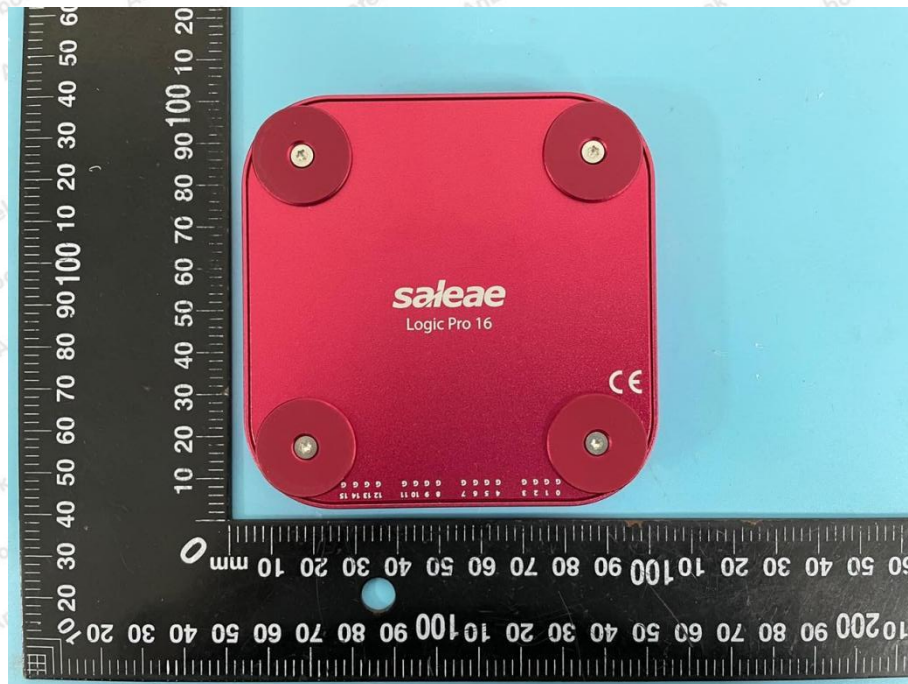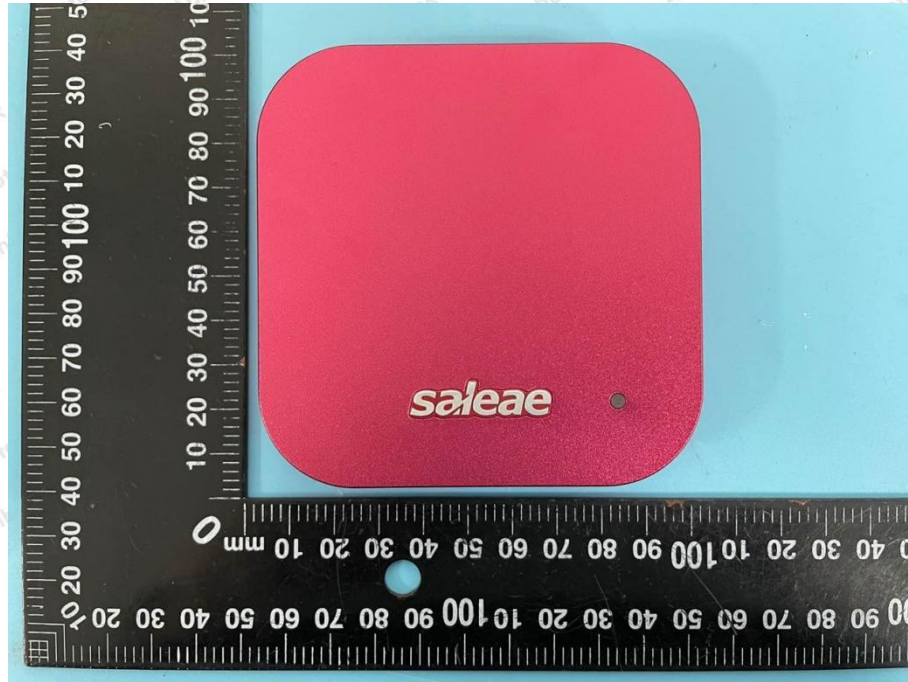

APPENDIX III -- INTERNAL PHOTOGRAPH

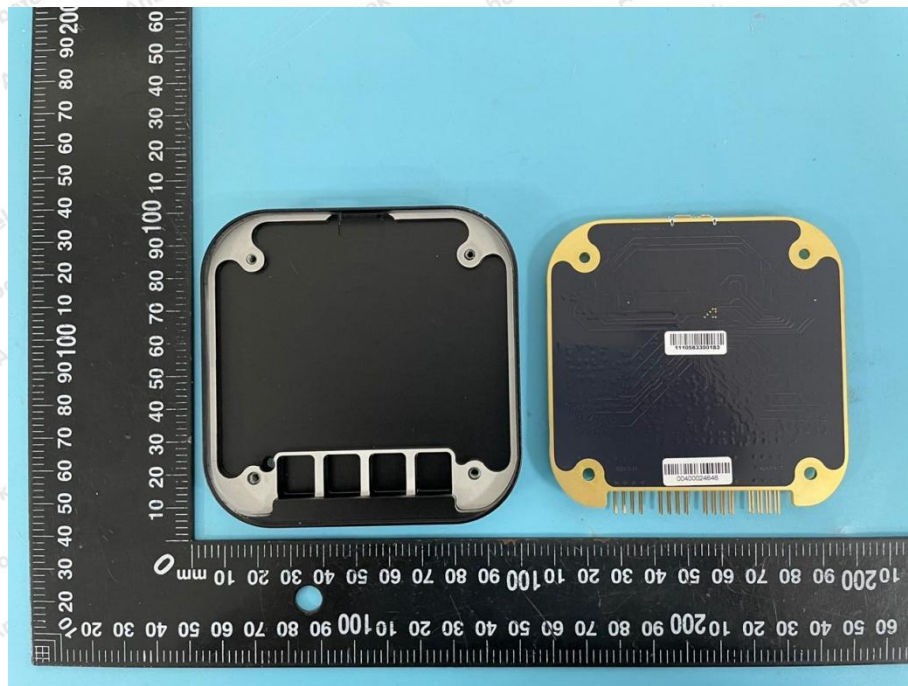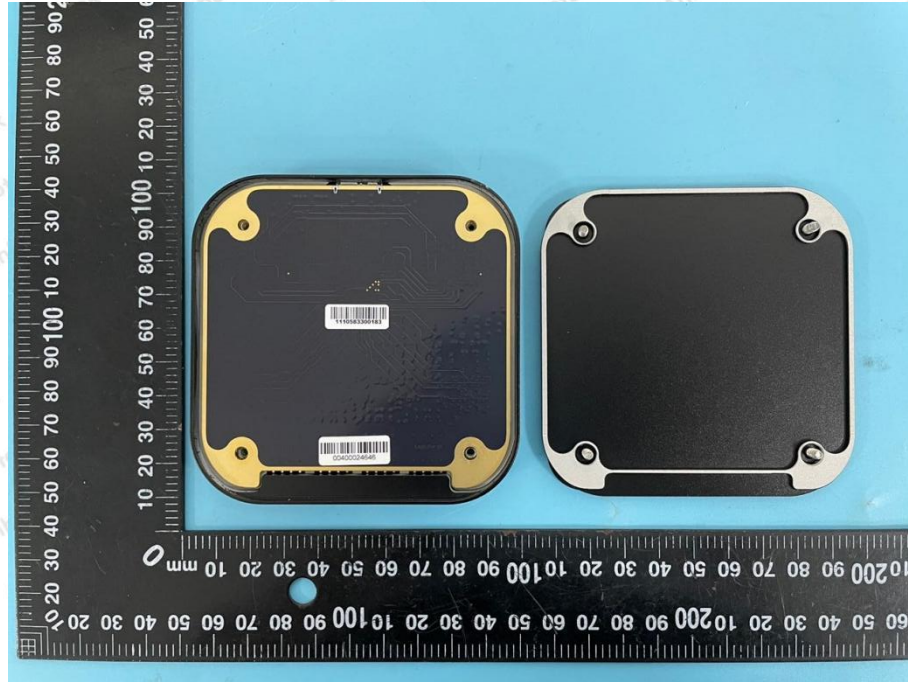

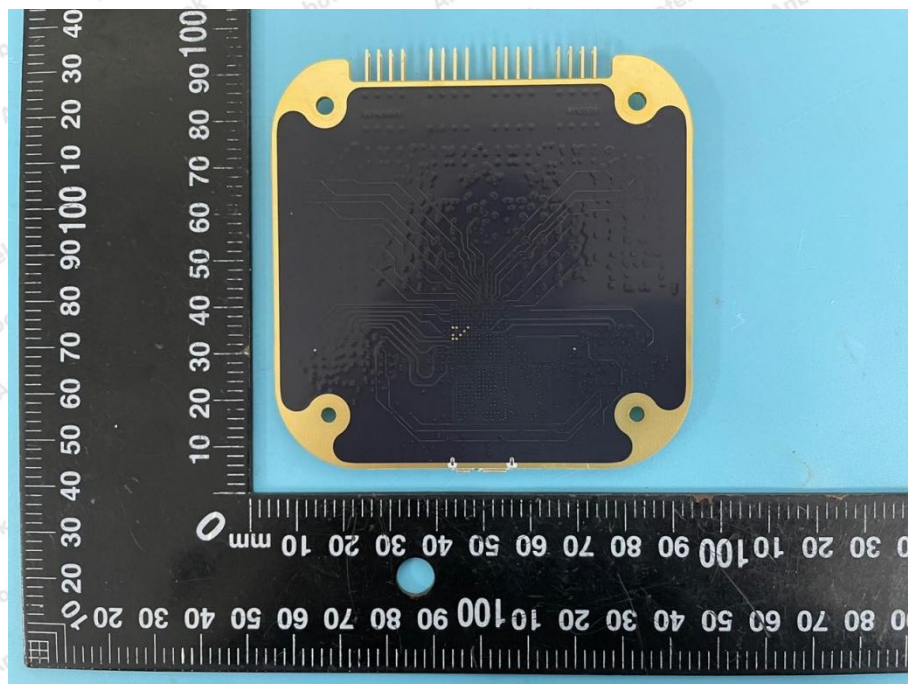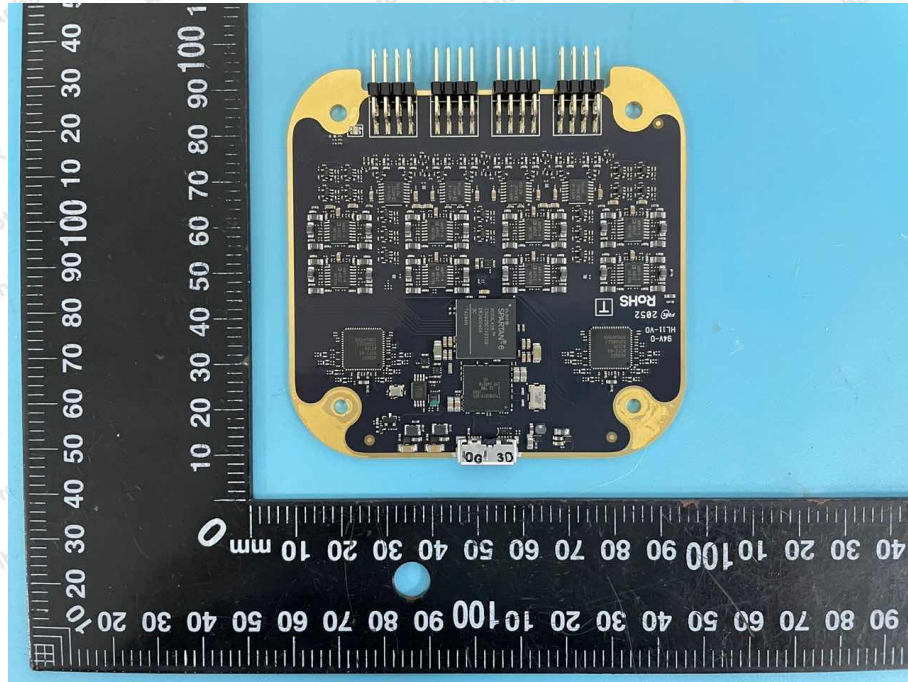

CE Label

1. The CE conformity marking must consist of the initials 'CE' taking the following form:

If the CE marking is reduced or enlarged, the proportions given in the above graduated drawing must be respected.

2. The CE marking must have a height of at least 5 mm except where this is not possible on account of the nature of the apparatus.

3. The CE marking must be affixed to the product or to its data plate. Additionally it must be affixed to the packaging, if any, and to the accompanying documents.

4. The CE marking must be affixed visibly, legibly and indelibly.

It must have the same height as the initials 'CE'.

----- End of Report -----

