EasyLED Back Light

for stereo microscopy



The EasyLED Back Light integrates high brightness LEDs with controller electronics into the head of the illuminator, offering easy and ergonomic operation. Made with a SCHOTT Opalika® glass surface, it's ideal for transparent specimens

Features:

- Powerful light density up to 12,000 cd/m².
- Continuous dimming from 0-100%.
- Integrated controller.
- · Scratch-resistant surface.

Advantages:

- Made with SCHOTT Opalika® for perfect homogeneity.
- Easy to use thanks to integrated operational elements.
- Robust design for operation in demanding environments.

Technical Specifications:

General		
Part No.		600.400
Dimensions – (OD x H)	(mm / inch)	83,9 x 16 / 3.3" x 0.63"
Weight	(kg)	Approx. 0.6
Cooling		convection
Electrical		
Operating voltage, frequency		100 − 240 V ~, 50 − 60 Hz
Input voltage	(V)	12 DC
Power consumption	(VA)	max. 6
Protection class		II
Overvoltage category		T.
Lamp type		High Power LEDs
Lamp liftetime	(h)	50.000 ¹
Lighting information		
Luminance, max.	(cd/m ²)	12.000
Color temperature	(K)	Approx. 5.600
Certification marks		
Marking		CE, (power supply unit CE, UL, PSE)
EMC-class		В

¹ max. decline of light output to 70% of origin level

We provide a variety of accessories for our EasyLED Series. For details please refer to our system diagrams or according datasheets.

Distribution in the UK & Ireland



Characterisation, Measurement & Analysis Lambda Photometrics Limited Lambda House Batford Mill


Lambda House Batford Mill Harpenden Herts AL5 5BZ United Kingdom

E: info@lambdaphoto.co.uk W: www.lambdaphoto.co.uk T: +44 (0)1582 764334

F: +44 (0)1582 712084



Dimensions

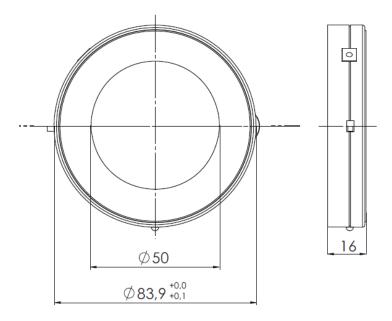

Pictures are provided for illustration purposes only, and may not provide an accurate reflection of the actual product.

Distribution in the UK & Ireland



Lambda Photometrics Limited Lambda House Batford Mill Harpenden Herts AL5 5BZ United Kingdom

E: info@lambdaphoto.co.uk
W: www.lambdaphoto.co.uk
T: +44 (0)1582 764334
F: +44 (0)1582 712084

