


## AM7515MZTL - Edge



With the use of the latest, cutting-edge optics, a brand new 5 megapixel sensor and several special features such as Flexible LED Control (FLC) and full aluminum body, the Dino-Lite AM7515MZTL is a marvel of technology and the best choice for the high-demanding professional. The Dino-Lite AM7515MZTL offers superb image quality and color reproduction in a robust, compact and appealing housing.

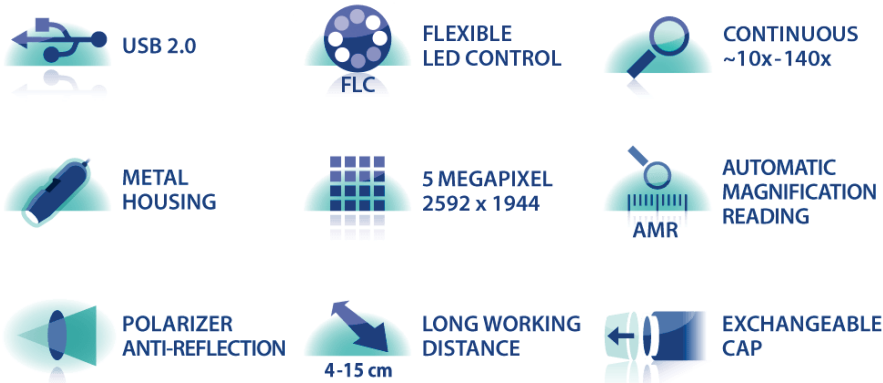

The AM7515MZTL is part of the Long Working Distance (LWD) range and with its Long Working Distance and magnification range from 10 - 140x, it is suitable for a wide range of applications where extra distance to the object or a larger field of view is required.

The extra working distance and larger field of view make this model an ideal solution for tasks such as repair, rework or assembly or for working with bulky or fragile objects that cannot be touched. Because of the built-in polarization filter this model is ideal when working with shiny or reflective objects such as metal, plastic, glass, jewelry, electronics, etc. The AMR function is of particular importance when the measurement functions are frequently used.

The main features of the AM7515MZTL are:

5 Megapixel Edge sensor, Long Working Distance (LWD) 10-140x magnification, larger Field Of View (FOV) integrated polarizer, aluminum housing, Automatic Magnification Reading (AMR), Flexible LED Control (FLC), extensive measurement functions, Calibration, exchangeable front caps and more.

## **Additional Info**

- Dino-Lite Range: Dino-Lite Long Working Distance
- Resolution: High (5 Megapixel)
- Magnification: Low/medium (10x-140x)
- Interface: USB 2.0
- Working Distance: Long
- Price Range (excl. VAT): €750,00 - €1000,00
- Light/ LED type: White
- ESD Safe: Yes
- Polarizer: Yes
- Housing: Metal housing
- Special feature: Aut. Magn. reading, Flexible LED Control (FLC)
- Dino-Lite Range: Dino-Lite Long Working Distance
- Light/ LED type: White
- Number of LEDs: 8
- LED on/off switchable: Yes
- Infrared filter: IR cut-filter >650 nm
- Diffuser available: Yes (N3C-D included)
- Emission filter: No
- Polarizer: Yes, linear
- Magnification: 10-140x
- Macro zoom: No
- Working Distance: Long
- Resolution: 5 Megapixel (2592x1944)
- Maximum Frame rate: 30 fps
- Interface: USB 2.0
- Housing material: Metal housing
- Magnification lock: Yes
- Measurement: Yes
- Calibration: Yes
- Microtouch sensor: Yes
- ESD Safe: Yes
- Special feature: Aut. Magn. reading, Flexible LED Control (FLC)
- Package contents: Microscope, Carry pouch, Software CD, Calibration target, User manual, N3C-O- Open cap, N3C-C- Closed cap, N3C-D- Diffuser cap, N3C-E- Extension cap, N3C-L- Long cap, N3C-S- Side light cap
- Price Range: €750,00 - €1000,00

- **Details**

- Dino-Lite range: Dino-Lite Long Working Distance

- **Lighting**

- Light/ LED type: White
- Number of LEDs: 8
- LED on/off switchable: Yes
- Infrared filter: IR cut-filter >650 nm
- Diffuser available: Yes (N3C-D included)
- Emission filter: No
- Polarizer: Yes, linear

- **Optics**

- Magnification: 10-140x
- Macro zoom: No
- Working distance: Long
- Lens type: Glass with anti-reflection coating

- **Sensor**

- Sensor type: CMOS
- Resolution: 5 Megapixel (2592x1944)
- Maximum frame rate: 30 fps

- **Compatibility**

- Interface: USB 2.0
- Operating system: Windows XP, Vista, 7, 8 & 10, MacOS 10.9 and up
- Included software: DinoCapture 2.0 (Windows), DinoXcope (Mac OS)
- Supported image formats (Windows): BMP, GIF, PNG, JPG, TIF, RAS, PNM, TGA, PCX, MNG, WBMP, JP2, JPC, PGX
- Supported video formats (Windows): WMV, FLV, SWF
- Supported image formats (MacOS): JPEG, PNG
- Supported video formats (MacOS): MOV
- Imaging standards: DirectShow, UVC

- **Housing**

- Housing material: Metal housing
- Magnification lock: Yes
- Dimensions: 10.5cm (L) x 3.2cm (D)
- Weight: 125g
- Cable length: 1.8m

- **Features**

- Special feature: Aut. Magn. reading, Flexible LED Control (FLC)

- Measurement: Yes
- Calibration: Yes
- Microtouch sensor: Yes
- ESD safe: Yes

• **Information**

- Package contents:  
Microscope, Carry pouch, Software CD, Calibration target, User manual, N3C-O- Open cap, N3C-C- Closed cap, N3C-D- Diffuser cap, N3C-Extension cap, N3C-L- Long cap, N3C-S- Side light cap
- Warranty information: 2 years European warranty
- Regulatory approval: CE, FCC, ROHS
- Price range: €750,00 - €1000,00
- Working distance/ field of view/ depth of field:

Magnification Rate	Working Distance*	Field of View(x)	Field of View(y)	Depth of Field
10	234.5	39.0	31.2	12
20	112.5	19.5	15.6	4.5
30	72.5	13.0	10.4	3.1
40	54.5	9.8	7.8	1.8
50	43.5	7.8	6.2	1.2
60	37.5	6.5	5.2	0.9
70	33.7	5.6	4.5	0.6
80	31.3	4.9	3.9	0.5
90	29.9	4.3	3.5	0.37
100	29.2	3.9	3.1	0.28
110	29.1	3.5	2.8	0.22
120	29.3	3.3	2.6	0.17
130	29.8	3.0	2.4	0.12
140	30.5	2.8	2.2	0.09
<b>Listed values may differ slightly</b>	<b>* Without front cap</b>			<b>Unit = mm</b>

PDF generated on: 05-04-2019

Distribution in the UK & Ireland



**Characterisation,  
Measurement &  
Analysis**

**Lambda Photometrics Limited**  
Lambda House Batford Mill  
Harpenden Herts AL5 5BZ  
United Kingdom  
E: [info@lambdaphoto.co.uk](mailto:info@lambdaphoto.co.uk)  
W: [www.lambdaphoto.co.uk](http://www.lambdaphoto.co.uk)  
T: +44 (0)1582 764334  
F: +44 (0)1582 712084